



Continuous Inkjet

Videojet® 1040



Proven Videojet performance for general coding needs at great value



Specifically designed to meet your needs, the Videojet 1040 eliminates the compromises that small- and medium-sized manufacturers face utilizing other entry-level printing solutions.

The 1040 delivers unparalleled value through versatility, simplicity and robust operation.

Robust operation

- Auto-flushing printhead delivers up to 12 days of continuous use without cleaning
- Dynamic Calibration™ automatically adjusts printing parameters for changing temperature or humidity conditions without manual operator intervention
- Reliable start-up and print following normal weekend shutdowns

Print quality

- Proven nozzle technologies deployed for consistent print quality for general coding needs
- Nozzle technology enables different size characters for high-quality codes on both primary products and outer cases

Eliminate coding mistakes

- Help operators ensure correct codes will be printed through visual job selection and layout previews
- Reduce risk of waste and rework from incorrect codes, with guided data entry and automatic date and time inserts
- Auto Coding functionality uses the optional product detector to adjust to changing line speeds without the need for an encoder

Simple usability

- Easy to operate intuitive 7" color touchscreen results in fewer steps to input codes and less operator training
- Ensure correct fluid usage through Smart Cartridge™ delivery system
- Modular design helps ensure rapid recovery from downtime through quick and easy spare parts replacement

No mess, no waste, no mistakes

The Smart Cartridge™ fluid delivery system contains a microchip that ensures the correct fluids are being used and alerts operators if the wrong cartridge is inserted.

A unique design ensures all fluids are drained from the cartridges with no waste, maximizing consumption and saving costs.



Inks for unparalleled performance


Our chemically advanced and proven inks are designed for today's applications and production environments to deliver optimal performance and maximum uptime.

- Rigorously tested across a variety of environmental conditions
- Chemical compatibility between fluids and hardware helps prevent premature deterioration
- Compliant with stringent purity and filtration standards and 100% batch testing

Unique printhead innovation

Auto-flushing functionality helps to reduce ink build-up inside the nozzle, enabling printers to run longer between cleaning intervals.

Consistent code quality in a variety of environments at multiple speeds is controlled using advanced software algorithms.

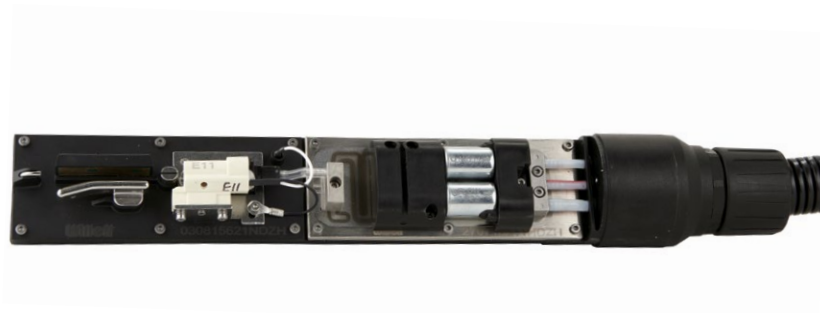

Videojet® 1040 print sample guide

Description	Print sample
Single line 5x5	ABCDEFGH 9bcdef9 12345 5X5
Single line 7x5	ABCDEFGH abcdef9 12345 7x5
Single line 9x7	ABCDEFGH abcdef9 12345 9X7
Single line 12x9	ABCDEFGH abcdef9 12345 12X9
Single line 16x10	ABCDEFGH abcdef9 12345 16X10
Twin line 5x5	ABCDEFGHIJKLMN OP 1234567890 5X5
Twin line 7x5	ABCDEFGHIJKLMN OP 1234567890 7X5
Twin line 9x7	ABCDEFGHIJKLMN OP 1234567890 9X7
Twin line 12x9	ABCDEFGHIJKLMN OP 1234567890 12X9
Arabic character 9 high	ا ب ت ث ج ح خ د ذ ر ز س ش
Twin line 12x12	小字符喷码机 稳定性好打印质量高
Twin line 16x12,7x5	小字符喷码机 2016/06/01
Inverted/reversed characters Accommodates product lines going any direction and products in various orientations on the production line	IWAELI TEXT TEXT REVERSE
Graphics and logos	

All images printed at 60dpi

Videojet® 1040

Continuous Inkjet

Line speed capability

Can print 1 to 2 lines of print at speeds of up to:
 Single line max speed = 130m/min (426.5ft/min)
 Twin line max speed = 50m/min (164ft/min)

Font matrix configuration

Single-line: 5x5, 7x5, 9x7, 12x9, 12x12, 16x12
 Twin-line: 5x5, 7x5, 9x7, 12x9, 12x12

Nominal character height

Selectable from 0.079" (2mm) to 0.295" (7.5mm), depending on font

Throw distance

5mm to 15mm (0.20" - 0.59") with the print quality optimized for 12mm (0.47")

User interface options:

178mm (7.0") TFT-LCD touch screen with easy operability and fewer steps to input codes

Character sets

Russian/Bulgarian, Turkish/Scandinavian, Greek, Arabic, Hebrew, East European and European/American

Languages and interface options

English, Arabic, Bulgarian, Czech, French, Greek, Hebrew, Hungarian, Polish, Portuguese, Russian, Spanish, Thai, Turkish and Vietnamese

Data interface

USB 2.0

Message storage

Up to 15 messages

Environmental protection

IP43 standard; no plant air required; stainless steel cabinet

Printhead

Heated printhead
 Nozzle size: 60 micron

Printhead umbilical

Ultra flexible
 Length: 2m (6.6'), MEK resistant

Fluids containers

Ink Smart Cartridge™ 750ml (0.793 qt.)
 Make-up Smart Cartridge™ 750ml (0.793 qt.)



www.sorim-holding.com
info@sorim-holding.com

Temperature/humidity range

5°C to 45°C (41°F to 113°F)
 0% to 90% RH non-condensing

Electrical requirements

Nominal supply power 100-120 / 200-240 VAC at 50/60 Hz., 60W nominal

Approximate weight

15kg (33.1lbs.)



Dimensions

